




# ERGOPLUS 555





1.45 Kg

<b>V</b> peak	113	<b>Ø</b> mm	1.0 - 1.2 - 1.6 2.0 - 2.4	<b>X</b> 100%	550A CO <sub>2</sub> 500A Mix
	2÷4 bar		1.6 l/min		

CODE	↔	
MB7943	3 m	EURO
MB7944	4 m	EURO
MB7945	5 m	EURO



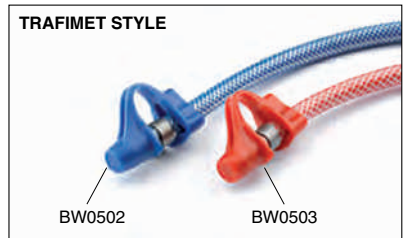
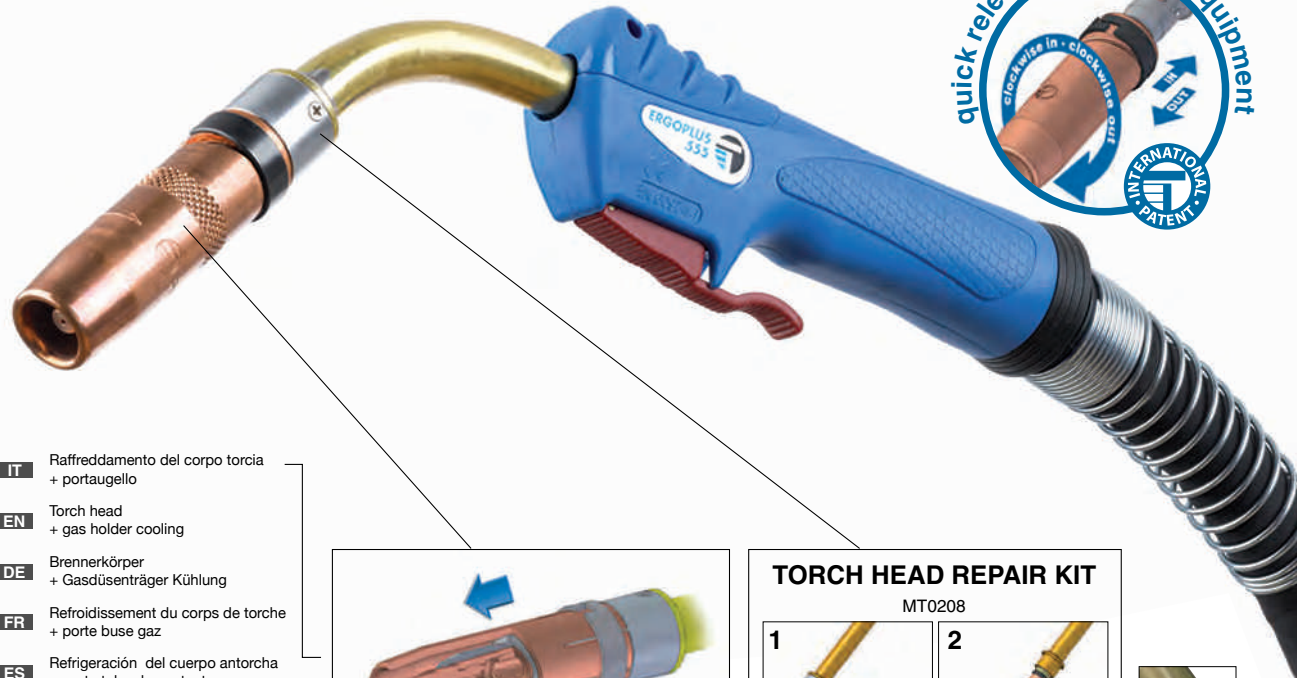


- IT** Raffreddamento del corpo torcia + portaugello
- EN** Torch head + gas holder cooling
- DE** Brennerkörper + Gasdüsenträger Kühlung
- FR** Refroidissement du corps de torche + porte buse gaz
- ES** Refrigeración del cuerpo antorcha + porta tubo de contacto
- TR** Soğutma (Torç boynu + Nozul tutucu)
- RU** Raffreddamento del corpo torcia fino all'ugello

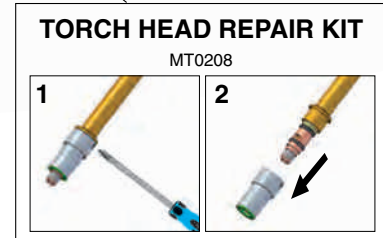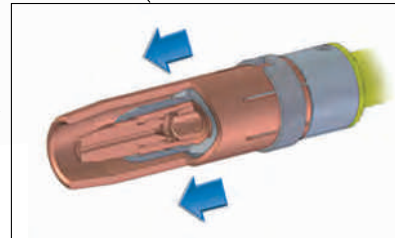


EN 60974-7



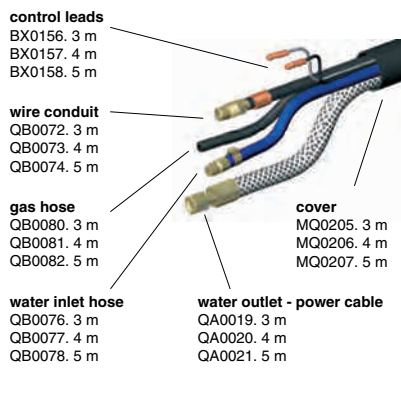


Ø	Cu	Cu-Ni	Cu for Al	CuCrZr
0,8	MD0005-08	MD0005-38	MD0005-58	
0,9	MD0005-09		MD0005-59	
1,0	MD0005-10	MD0005-40	MD0005-60	MD0005-80
1,2	MD0005-12	MD0005-42	MD0005-62	<b>MD0005-82</b>
1,4	MD0005-14	MD0005-44		MD0005-84
1,6	MD0005-16	MD0005-46	MD0005-66	MD0005-86
2,0	MD0005-20		MD0005-70	
2,4	MD0005-24		MD0005-74	

Ø	Triangular Cu	Triangular CuCrZr
1,0	MD1005-10	MD1005-80
1,2	MD1005-12	MD1005-82
1,6	MD1005-16	MD1005-86

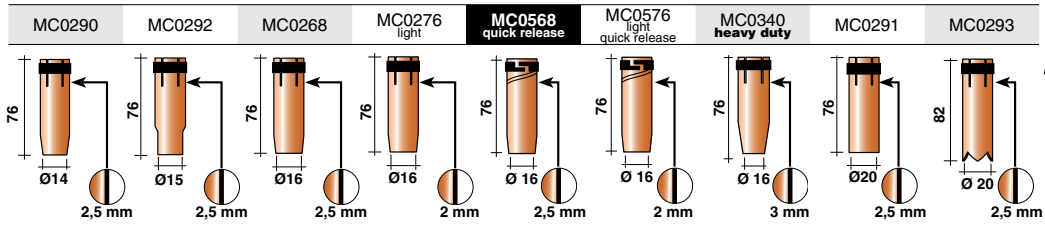

**STANDARD** (REF.)

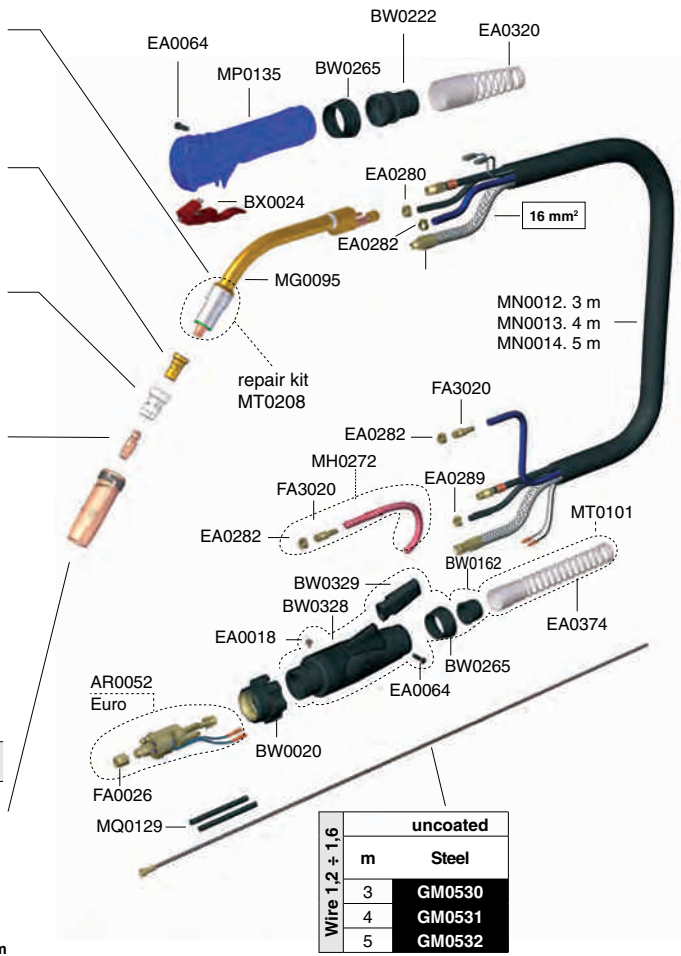

Wire 1,2 + 1,6	uncoated	
	m	Steel
3		<b>GM0530</b>
4		<b>GM0531</b>
5		<b>GM0532</b>