


PLUS 600 wire conduit + gas



3 - 4 - 5 m

1.45 Kg
1 mV peak 113
Ø mm 1.0 - 1.2 - 1.6
2.0 - 2.4
X 100% 600A CO₂
550A Mix2±4 bar
1.6 l/mintorch head
MG0065. 200 mm

CODE ↔

MB2300 3 m EURO

MB2301 4 m EURO

MB2302 5 m EURO

TRAFIMET STYLE




BW0502

BW0503



- IT** Doppio circuito di raffreddamento del corpo torcia + portagello
- EN** Double cooling circuit for torch head + gas holder
- DE** Doppel-Kühlkreislauf für Brennerkörper + Gasdüsenträger
- FR** Double circuit de refroidissement du corps de torche + porte buse gaz
- ES** Doble circuito de refrigeración del cuerpo antorcha + porta tubo de contacto
- TR** Torç boynu ve nozul tutucu için çift soğutma kanalı
- RU** Двойной контур охлаждения головки горелки и держателя наконечника



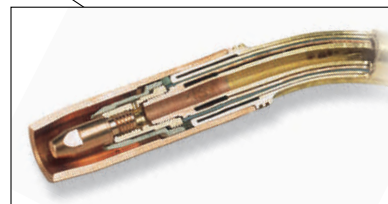


EURO



EN 60974-7



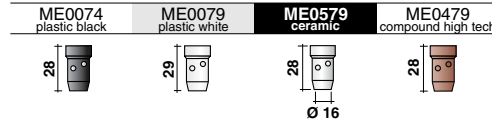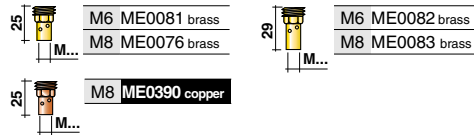
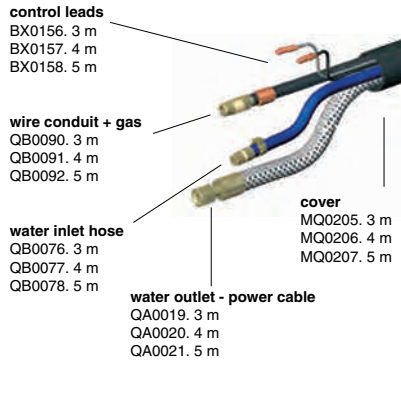


Ø	Cu	Cu-Ni	Cu for Al	CuCrZr	Triangular Cu
0,6	MD0009-06	MD0009-36			
0,8	MD0009-08	MD0009-38	MD0009-58	MD0009-78	MD1009-08
0,9	MD0009-09				
1,0	MD0009-10	MD0009-40	MD0009-60	MD0009-80	MD1009-10
1,2	MD0009-12	MD0009-42	MD0009-62	MD0009-82	MD1009-12
1,4	MD0009-14	MD0009-44			
1,6	MD0009-16	MD0009-46	MD0009-66		



Ø	Cu	Cu-Ni	Cu for Al	CuCrZr
0,8	MD0005-08	MD0005-38	MD0005-58	
0,9	MD0005-09		MD0005-59	
1,0	MD0005-10	MD0005-40	MD0005-60	MD0005-80
1,2	MD0005-12	MD0005-42	MD0005-62	MD0005-82
1,4	MD0005-14	MD0005-44		MD0005-84
1,6	MD0005-16	MD0005-46	MD0005-66	MD0005-86
2,0	MD0005-20		MD0005-70	
2,4	MD0005-24		MD0005-74	

Ø	Triangular Cu	Triangular CuCrZr
1,0	MD1005-10	MD1005-80
1,2	MD1005-12	MD1005-82
1,6	MD1005-16	MD1005-86

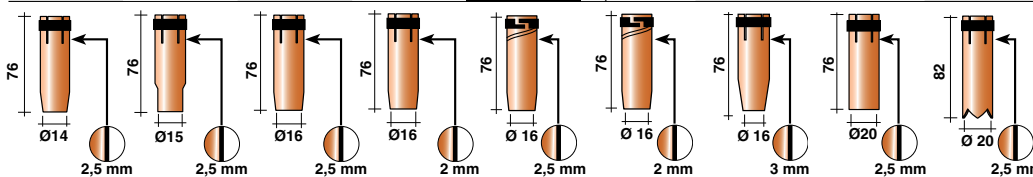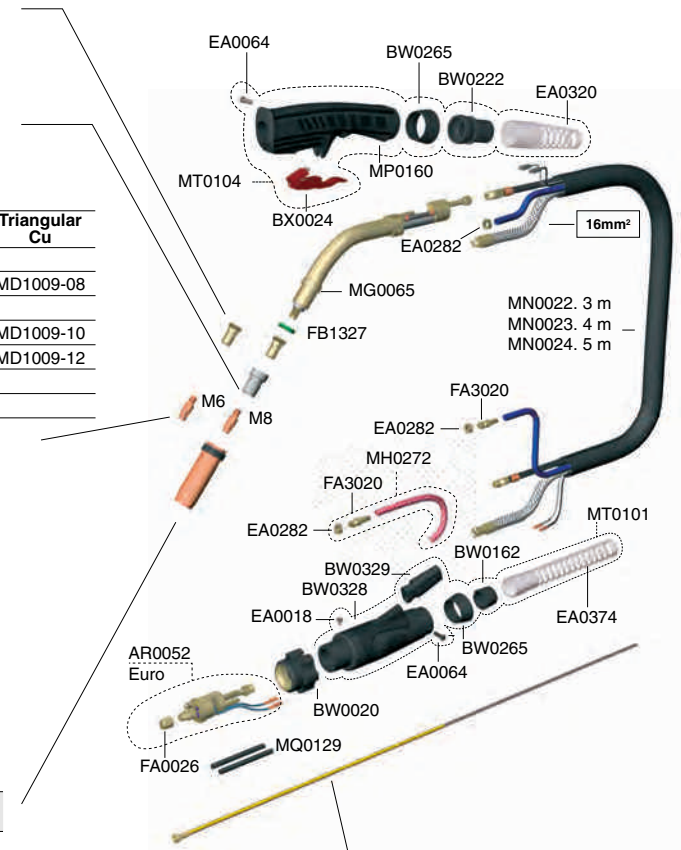

STANDARD

(REF.)

yellow color	
Wire 1,2 + 1,6	Steel
3	GM0540
4	GM0541
5	GM0542