


B 400

V peak	113	Ø mm	0.8-1.2-1.6 2.0-2.4	X 60%	400A CO ₂ 350A Mix
------------------	-----	----------------	------------------------	-----------------	----------------------------------

CODE

**F16704.5**

4,5 m / 15'

EURO - BD

**PRATIX**
EQUIPMENT


EURO - BD




EN 60974-7



ME0112 (4635)



ME0111 (4435)







Ø	Cu
0,6	MD0214-06 (1597)
0,8	MD0214-08 (1588)
0,9	MD0214-09 (1589)
1,0	MD0214-10 (1596)
1,2	MD0214-12 (1590)
1,4	MD0214-14 (1598)
1,6	MD0214-16 (1591)
2,0	MD0214-20 (1592)
2,4	MD0214-24 (1593)
2,8	MD0214-28 (1594)
3,2	MD0214-32 (1595)




Ø	Cu
0,6	MD0215-06 (7497)
0,8	MD0215-08 (7488)
0,9	MD0215-09 (7489)
1,0	MD0215-10 (7496)
1,2	MD0215-12 (7490)
1,4	MD0215-14 (7498)
1,6	MD0215-16 (7491)
2,0	MD0215-20 (7492)
2,4	MD0215-24 (7493)
2,8	MD0215-28 (7494)

MC0420 (4491) MC0421 (4591) MC0422 (4492) MC0423 (4592)



STANDARD

(REF.)

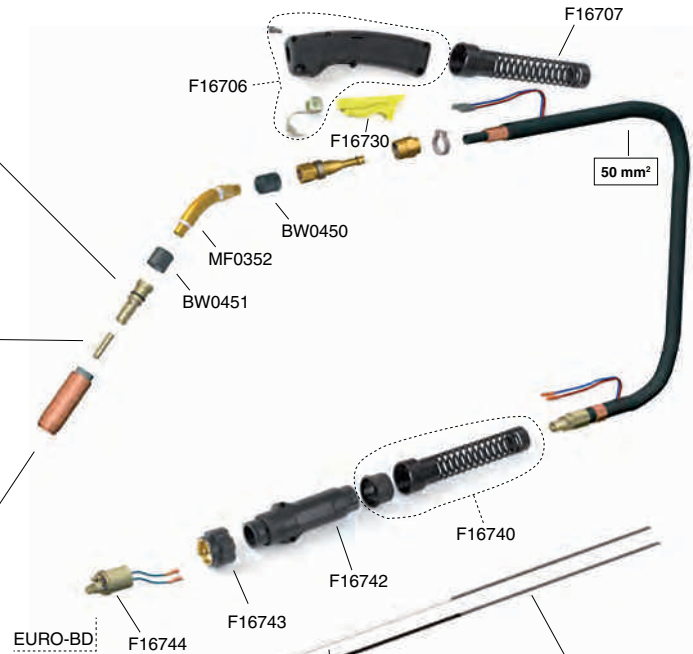

black color	
Wire 0,6 ÷ 0,8	m Steel
	4,5 F16747.5

white color	
Wire 1,0 ÷ 1,6	m Steel
	4,5 F16749.5

black color	
Wire 0,9 ÷ 1,2	m Steel
	4,5 F16748.5